



ARKK
PURE

MANUAL

ARKK Z

Reverse Osmosis
Water Purification System



www.renewellwater.com



info@renewellwater.com

CONTENT

| | |
|--|----|
| 1. BEFORE INSTALLATION | 1 |
| 2. PRODUCT INTRODUCTION | 2 |
| 3. SAMPLE CONNECTION | 2 |
| 4. INSTALLATION TIPS | 3 |
| 5. INSTALLATION STEPS | 4 |
| 6. FIRST TIME USAGE | 8 |
| 7. USER INTERFACE | 9 |
| 8. REPLACEMENT OF FILTER CARTRIDGE | 11 |
| 9. FILTER REPLACEMENT INSTRUCTION | 11 |
| 10. HOOK UP TO YOUR REFRIGERATOR/ICE MAKER | 12 |
| 11. MAINTENANCE | 13 |
| 12. TROUBLE SHOOTING | 14 |
| 13. FREQUENTLY ASKED QUESTIONS | 16 |

Thank you for purchasing 800G RO PURIFIER reverse osmosis undersink filter system with 800G RO membrane. If you have any questions or need any assistance, please contact US.

INSTALLATION INSTRUCTION

1. Before Installation

► Inspect Box

Open the box and take out the system and all the components. Inspect them carefully according to "Product Introduction" and make sure nothing is missing or damaged during shipping. If any parts are cracked or broken, please do not proceed with the installation and contact us for an exchange or diagnosis.

► Technical Parameters

| | | | |
|-------------------------|----------------------|-----------------------|---------------------------|
| Model | ArkkZ | Operating Temp | Min.39°F,Max.100°F |
| Rated Frequency | 50-60HZ | Rated Power | 120W |
| Flow Rate | 2.1 litres/m | Rated Voltage | 110-240VAC |
| Working Pressure | Min.20psi Max. 80psi | Daily Production Rate | 800 gallons (3028 liters) |
| Applicable Water Source | Municipal water | | |

Rated flow 2.1 litres/m @25 °C (77°F). **Low water temperature will slow down water flow.**


Model: ArkkZ

2. Product Introduction

► Front




► Back



► Accessories:


RO Faucet
Drain Saddle
Feed Water Valve
1/4" Blue Tubing
1/4" Red Tubing
3/8" White Tubing
Blade
Plumber Tape
1/4" Quick Fitting
Power supply

3. Sample Connection

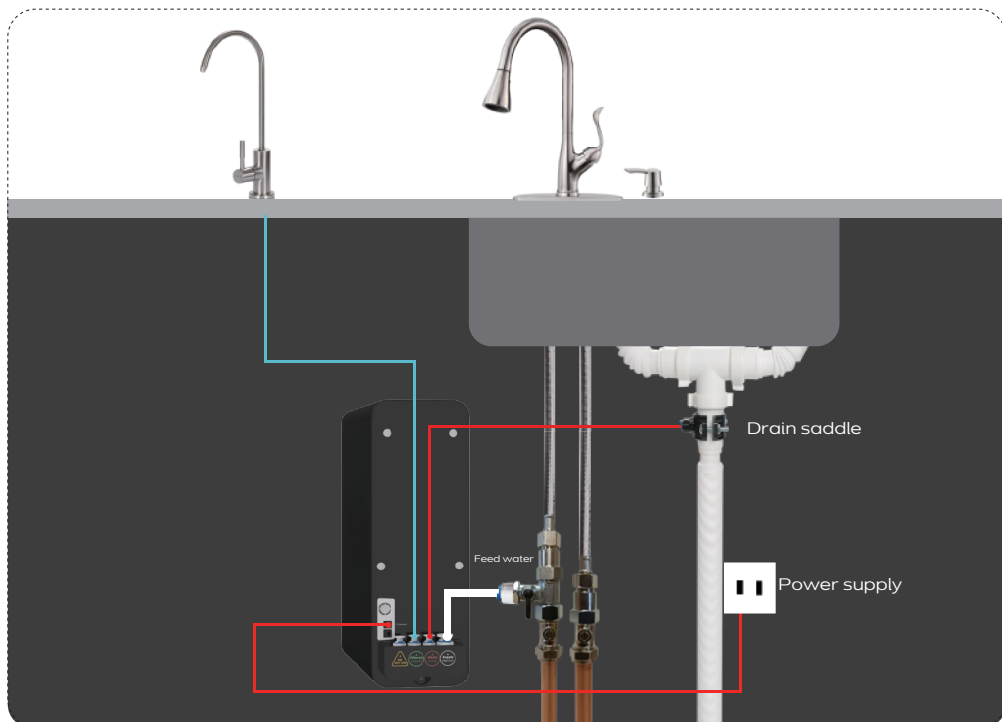

4. Installation Tips

► How to cut the tubing?



Please cut the tubing into two sections in proper length, make sure cut them squarely and cleanly.



► How to connect/disconnect the tubing?

To connect: please push the tubing into the fitting and make sure it is fully inserted. Then put the blue lock clip on the fitting, it will lock the tubing in place.



To disconnect: please remove the blue lock clip from the fitting, push in the lock sleeve, and then pull out the tube from the fitting

Note: If the tubing is not fully inserted, water leakage may occur.

Pulling out the tubing directly will damage the fitting, which may also cause water leakage.



1. Insert to seal the connection



2. Remove to disconnect

► How to drill a hole on my sink (Optional)



Note: Please remember to wear safety glasses to protect your eyes before proceeding.

Use a 1/2" metal bit to drill. The recommended diameter of the hole ranges from 1/2" to 1.2" .

5. Installation Steps

Precautions:

- Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection.
- Testing was performed under standard laboratory conditions, actual performance may vary.
- For cold water use only.
- This filter must be protected from freezing, which can cause cracking of the filter and water leakage.
- Do not allow children under 3 years of age to have access to small parts during installation.
- The installation must comply with all applicable state and local regulations.

Step 1: Cut and Soften the 3/8" white tubing

- ▶ Please cut the 3/8" white tubing in proper length, make sure cut them squarely and cleanly. (Fig .1)

▶ Fig.1



Step 2: Connect three-way feed water valve

- ▶ Push the 3/8 inch white tubing into feed water valve and connect white tubing to purifier Supply port.(Fig.2, Fig.3, Fig.4)


▶ Fig.2



▶ Fig.3



▶ Fig.4




Model: ArkkZ


Step 3: Connect the water supply (COLD WATER ONLY)

- ▶ Shut off the water supply. (Fig.5)
- ▶ Twist the feed water valve onto the angle valve and make sure the O ring is loaded.
- ▶ Connect cold water pipe onto the feed water valve. (Fig.6) Valve installation complete.

▶ Fig.5



▶ Fig.6



Step 4: Connect the "SUPPLY" water tubing

- ▶ Remove all the plugs by pressing the fitting sleeves except the one with "DO NOT USE" one. (Fig.7)



Warning:

Do not remove the left most plug! (There is a warning tag on the port).

- ▶ Connect the other end of 3/8" tubing into "Supply" port on the back of the system, make sure to insert the tubing about 0.8 inch to the end of the fitting. (Fig.8)
- ▶ Put the lock clip on the fitting to secure the connection. (Fig.9)

Fig.8



Fig.9



Model: ArkkZ

Step 5: Install the drain saddle

- ▶ Disassemble the drain saddle, and peel off the black sticker and stick to saddle valve (Fig.10)
- ▶ Choose a spot on the drain pipe that is convenient for installing the drain saddle. It is recommended to install the drain saddle on the vertical drain pipe. (Fig.11)
- ▶ Drill a 1/4" hole in the drain pipe. Make sure not to penetrate the opposite side of the pipe. (Fig.12)
- ▶ Mount the drain saddle and tighten the screws with a screw driver (Fig.13)
- ▶ Insert the 1/4" red tubing to the drain saddle about 1.4", and lock the fitting with a blue clip (Fig.14)


▶ Fig. 10




▶ Fig. 11




▶ Fig. 12



▶ Fig. 13



▶ Fig. 14



Step 6: Connect the "WASTE" water tubing

- ▶ Insert the other end of 1/4" red tubing into the "Waste" port on the back of the system. (Fig.15, Fig.16)

▶ Fig. 15



▶ Fig. 16



Model: ArkkZ

Step 7: Connect the "FILTERED" water tubing

Cut the 1/4" white tubing in proper length and insert one end into the "Filtered" port on the back of the system. (Fig.17)



► Fig.17



Note: Please make sure the tubings are fully inserted, otherwise may result in water leakage.

Step 8: Install the drinking faucet



Note: If the thickness of your counter is over 1.5" (3.8cm), please use the longer stem 4.5" (11.4cm) included in the manual pack.



Note: If your counter top or granite does not have an existing hole, please drill one (1/2") before proceeding.

- Follow the steps below and mount the faucet onto the sink top. (Fig.18, Fig.19, Fig.20)
- Mount the plastic gasket and gasket and screw nut underneath. (Fig.21, Fig.22, Fig.23)
- Connect the other end of 1/4" white tubing from the "FILTERED" port into the 1/4" quick fitting. (Fig.24, Fig.25, Fig.26)

► Fig. 18



► Fig. 19



► Fig. 20



► Fig. 21



► Fig. 22



► Fig. 23



► Fig.24



► Fig.25



► Fig.26




Step 9: Connect the power cord

- Turn on the angle valve and 3-way feed water valve. Check for leaks. (Fig.27)
- Insert the DC head of the power adapter into the "POWER" port on the back of the system. (Fig.28)



Note: It is important to turn on the water supply first then connect the power supply!

► Fig.27



► Fig.28



6. First time usage

- The system will automatically flush for 30 seconds after the power supply is plugged
- Before first use or after filter replacement, please flush the filter system by turning on the faucet for 20 min.



Note: When the system keeps producing water continuously for 30 minutes, the system will enter into protection status and all the components stop working. The indicators will flash in red. In this condition, please unplug the power for 10 seconds and then power on again.



Note: Please fully open the drinking faucet when dispensing water. Otherwise, it may cause system to malfunction (Fig.29, Fig.30)


► Fig.29



► Fig. 30



7. User Interface

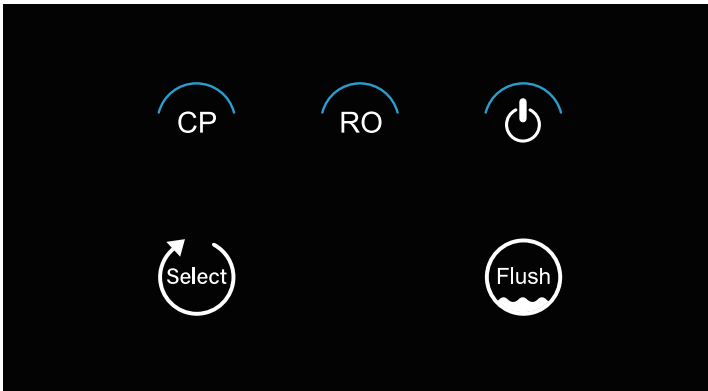

➡ Power-on

When the system is powered on, you will hear a beep. All indicators will be on for 3 seconds, and then the system will automatically flush for 30 seconds. After flushing, if there is no water production, it will turn into standby status. The power indicator will always light in blue when the system is plugged in.

➡ Water production

When the system is producing water, the power indicator will constantly light in blue.

→ Filter life indicator

Different colors suggest different remaining lifespan:

- A. Indicator constant lit in blue: the filter is normally working
- B. Indicator flashed in red: the filter lifetime is about to be expired (remaining lifespan <5%)
- C. Indicator constant lit in red: the filter is expired



Note: If the filter is expired, the buzzer will keep beeping when producing water to remind users of replacing filter. Filter life may vary depending on source water quality and water usage.

→ Long-time operation reminder

When the system keeps producing water continuously for 30 minutes, the system will enter into protection status and all the components stop working. The indicators will flash in red. In this condition, please unplug the power for 10 seconds then power on again.

→ Automatic flushing

- A. Flushing when powered on: when powered on, the system will be automatically flushed for 30 seconds.
- B. Flushing when cumulative water production reaches 5 minutes:
If the cumulative water production reaches 5 minutes, after returning into standby status, it will be automatically flushed for 10 seconds.
- C. Flushing when the system is in standby for 3 hours: if the system is in standby for 3 hours, it will be automatically flushed for 30 seconds.

→ Manual flushing

When the system is in standby status, press the "Flush" button, the system will start flushing. Press the "Flush" button again to stop.




Note: When the system is being flushed, the indicator will flash in blue.

8. Replacement of Filter Cartridge

- The replacement filter cartridges are : 2-in-1 Pleated Polyester and Carbon block and 800G membrane
- Please replace filter cartridges regularly according to the recommended replacement period shown below.

| Position | Filter cartridge | Recommended Replacement Period |
|-----------|---|--|
| 1st stage | 2-in-1 Pleated Polyester and Carbon Block | One year or cumulative water production for 60 hours (around 5000 liters) |
| 2nd stage | 800G RO membrane | Two years or cumulative water production for 120 hours (around 10000 liters) |

 **Note:** All the service life of the filter cartridge listed are based on actual laboratory test and the provided water. The actual service life of filter cartridge depends on source water quality and daily water usage.

9. Filter Replacement Instruction


Step 1: Cut off the power and turn on the water faucet to release water pressure

- Cut off the water supply and power before replacement. (Fig.31, Fig.32)
- Turn on the water faucet to release water pressure. (Fig.33)
- Remove the front cover of the filter. (Fig.34)
- Unscrew the cartridge needs to be replaced counter clockwise. (Fig.35)
Screw the new cartridge clockwise into the system.
- Connect the power code and turn on the water supply. (Fig.36)


► Fig.31



► Fig.32



► Fig.33



► Fig.34



► Fig.35



► Fig.36



Model: ArkkZ

Step 2: Reset the filter lifetime


Press the "Select" button, the buzzer will beep and you can start to select the filter you want to change. Press "Select" button to change between the filters and the selected filter lifetime indicator will flash. After selecting the filter, press "Select" button for 3 seconds. You will hear a beep. The selected filter's indicator will turn into constant blue light, which means the filter is successfully reset. If you do not operate within 10 seconds, it will automatically exit this mode and resume normal display.

Step 3: Flush the filter

Turn on the faucet to discharge the filtered water after replacement. If you replace the RO membrane, please do not use the water in the first 20 minutes. If you replace CP filter cartridges, please do not use the water in the first 10 minutes.

10.Hook Up to Your Refrigerator/Ice Maker

- ▶ The ÌON II Water Filter System can be connected with your refrigerator/Ice-maker by utilizing an extra ice maker connection kit (not included).

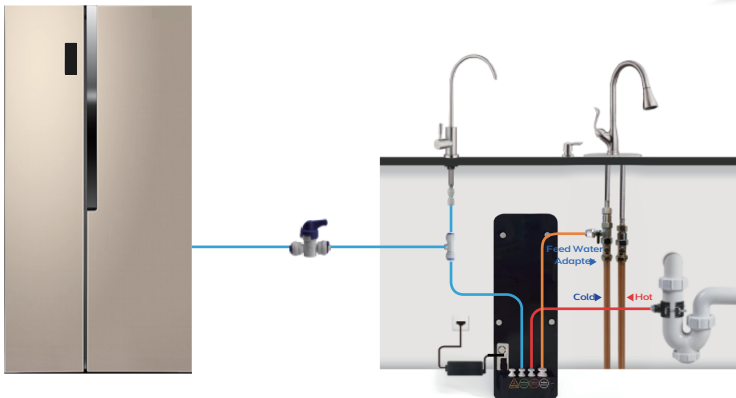

11. Maintenance

- ▶ Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection.

If you don't use the system for a long time:

- A. If the system has not been used for more than 2 days, please turn on the faucet and discharge the filtered water at least 5 minutes before usage.
 - B. If the system will not be used for more than 1 week, please seal the filter cartridges and store them in the refrigerator but do not put them in the freezer. Discharge filtered water for at least 10 minutes before next time usage.
 - C. If the system will not be used for a long time, please cut off the water supply, cut off the power and turn on the handle of the faucet to release the internal pressure and avoid damage to the system.
- ▶ Please replace the filter cartridge regularly according to the filter life indicator.
 - ▶ The testing was performed under standard laboratory conditions, actual performance may vary depending on the source water quality and water usage. In case of premature blockage and failure of the filters, it is recommended to replace the filter in accordance with actual usage.
 - ▶ Clean the system with clear water if necessary. Do not drench the system! Wipe only. Do not apply steel wool, abrasive cleaner or corrosive liquid to the filter to avoid damage to the filter system.
 - ▶ Keep the drain water pipe unobstructed to avoid damage to the filter or internal components.
 - ▶ When the drain pipe is blocked, do not use the system (please turn off the power) to avoid the waste water from soaking the floor.
 - ▶ Check the system and water pipe fittings regularly for water leakage to avoid any property damage.
 - ▶ Regularly check whether the power supply and wires are damaged or loose to avoid major accidents caused by electric leakage.

12. Trouble Shooting

| Fault | Possible Cause | Solution |
|--------------------------------|--|---|
| No water out of faucet | The system is not connected to the power adapter or the connection is loose. | Please check if the adapter is connected properly. |
| | Cold water valve, 3-way feed water valve or the faucet is off. | Please open the valves. |
| | Lifetime of the filter cartridge is expired. | Please replace the filter cartridge or contact customer service team. |
| | Connection of pipeline is incorrect. | Please check the pipelines and make sure the connection is correct. |
| Low water flow | Filter is blocked. | Please replace the filter according to the instruction. |
| | Water pressure is low, or water supply is insufficient. | Please contact customer service team. |
| | PE pipes are bent. | Please check PE pipes. |
| Filtered water in poor quality | Lifetime of the filter cartridge is expired. | Please replace the filter according to the instruction. |
| | The system has been off work for more than 2 days. | Please discharge water for 5 minutes before usage. |
| | Quality of feed water is too bad. | Please ensure the water source is municipally treated water or has been properly disinfected prior use. |
| Water leakage | Pipes or filters are not installed properly. | Please reinstall the system according to the instruction or contact customer service team. |
| | The O rings are missed. | Please contact customer service team. |
| | Other components are damaged | Please contact customer service team. |

| | | |
|---|--|--|
| Unchanged filter lifetime indicator | Electronic controller or display panel is damaged. | Please contact customer service team. |
| System is unstopable for a long time after turning off the faucet | The circuit board is broken. | Please contact customer service team. |
| | The high pressure switch is broken. | Please contact customer service team. |
| | The "FILTERED water" tubing is mistakenly inserted into "WASTE" port. | Check the system, water pipe fittings and connections, or contact customer service team. |
| | Filter is blocked. | Please check if the "FILTERED" tubing and "WASTE" tubing were in the right place. |
| | Feed water is cut off. | Please disconnect the power and wait for water supply recovery. |
| Examination indicator lights or flashes in red, or the beeper keeps beeping | Leakage detection system is abnormal. | Please contact customer service team. |
| | System is leaking. | Check the system, water pipe fittings and connections, or contact customer service team. |
| Button failure | The button is misoperated. | Please operate the button according to the instruction. |
| | The button is damaged. | Please contact customer service team. |
| Indicators on user interface disappear | The system is not connected to the power adapter or the connection is loose. | Please check if the adapter is connected properly. |
| | The panel is damaged or it's cable is loose. | Please contact customer service team. |

13. Frequently Asked Questions

Q: Why there are many white bubbles in the water?

Normally for the first time use of the RO system, the water seems to have white bubbles in it, which is normal and totally drinkable. It is because when the pump is pressurizing the water, it will pressurize the air at the same time. It will make the air molecules smaller, thus the solubility further increases.

The air can't be released at that time because of the pressure in the RO system. However, when you turn on the tap to get a cup of water, the pressure of air is released. So you will see a huge number of bubbles in the water. It looks cloudy and white, but they are just bubbles. After you put the water still for a while, all bubbles will be gone, the water is totally good for drinking.

Q: Why TDS is higher at the beginning, but back to normal range after about one minute?

Osmosis is a natural phenomenon happens in all RO system, no matter if you have a conventional RO system or tankless RO system. When the RO system starts to work, pressure from the pump overcomes natural osmotic pressure, forcing feed water through the RO membrane that removes the impurities. When the RO system stops working, the pump stops offering pressure as well. At that time, because of different concentrations, a small fraction of ions will enter into pure water and cause TDS to rise by a small amount. However, even if the TDS reading is a little high at the beginning, the quality water is still unbeatable by any other filtration methods including carbon, KDF, ceramic, UF, UV, etc.. The water is totally good to drink and you don't have to wait for about 1 minute to get the water, since the whole system will not release any harmful substances to the water. The TDS removing rate for 800G RO PURIFIER is about 94-95%, if your incoming TDS is high, the outlet TDS will be high too.

Q: My granite is thicker than 1.5 inch and the faucet stem is not long enough, what should I do?

Please feel free to contact us to claim for a longer thread stem. Simply email us your order ID, full name, shipping address and contact phone number for delivery. We will arrange the shipment for you ASAP.

Q: Why the system does not work after connecting the power cord?

Maybe you have plugged the power cord into the socket specially designed for garbage disposal, please change another socket.